



# Portable Tri-Roll Conveyors

*Lengths up to 60'*

*Home of Worldwide Quality Blending, Conveying, Tending, & Spreading Products!*



**#304 Stainless Steel Conveyor,  
w/ Mild Steel Tubing  
Undercarriage**

**18" or 24" Wide  
Crescent Top Belt**

**#304 Stainless Steel Weather  
Covers**



**End Drive or  
Wrap Drive  
Available \*\***

**#304 Stainless Steel Discharge  
Hood & Inlet  
Hopper**

**\*\* Conveyors 42' and  
longer require  
middle Wrap Drive**



## ***Doyle Equipment Mfg. Co., Inc.***

**4001 Broadway, P.O. Box 3024, Quincy, IL 62305**

**Toll Free: 800-788-8085 Fax: 217-223-3655**

**E-mail: [doyle@doylemfg.com](mailto:doyle@doylemfg.com) Web Site: [www.doylemfg.com](http://www.doylemfg.com)**




## Standard Features:

- 24" wide Crescent top belt, with stainless steel lacing
- Crowned and lagged drive and idler pull
- Square tubing style take-up assemblies (End Drive Units ONLY)
- Slide bearings, w/ take-up bolts (Wrap Drive Units ONLY)
- Direct head drive (End Drive Units ONLY)
- Stainless steel weather covers
- 205/75R 15" or 235/75R 15" Tires (Size depends on conveyor length)
- Tow hitch
- TEFC Motor (Horsepower depends on conveyor length)
- Factory assembled & tested



## Optional Features:

- 12" square or 10" round, fully enclosed, discharge spout
- Hinged deflector
- Telescopic downspout
- Hydraulic double cylinder scissor lift undercarriage
- Swivel axles
- Dual tail wheels
- PTO drive, in lieu of electric
- Hydraulic drive, in lieu of electric motor Note: This option includes hydraulic lines and hoses to hydraulic motor.

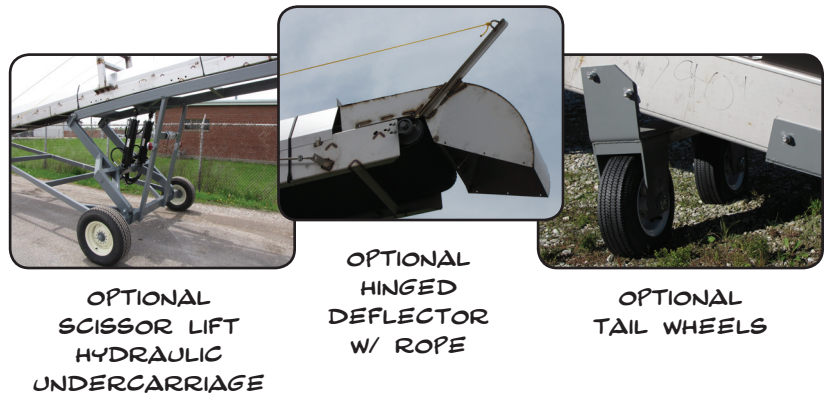

A	B	C
30'	30'-8"	14'-7"
36'	35'-11"	17'-3"
40'	39'-6"	19'-1"
45'	43'-12"	21'-4"
50'	48'-5"	23'-8"
55'	51'-11"	25'-11"
60'	57'-4"	28'-2"

